



D-D Slimline Designer bracket to heat sink correct fitment

Compatible with Hydra 52/52HD, Hydra 26/26HD, Vega/FC and late model Hydra

It is most important that when fitting the D-D Slimline bracket that the light is secured to the bracket in the correct manner.


Failure to do so may result in the light being knocked from the bracket or poor installation of the light on the bracket causing the light to droop.

To fit the lights correctly please follow the steps below.

1. Remove the grill from the light by gently pulling the middle of the grill up and away from the heat sink by flexing the center upwards. This will disengage the end clips that hold the grill into the heat sink.




2. Now offer the bracket up to the heat sink so the lugs on the bracket slide onto the **second** inboard fin of the heat sink and carefully slide the bracket onto the light.

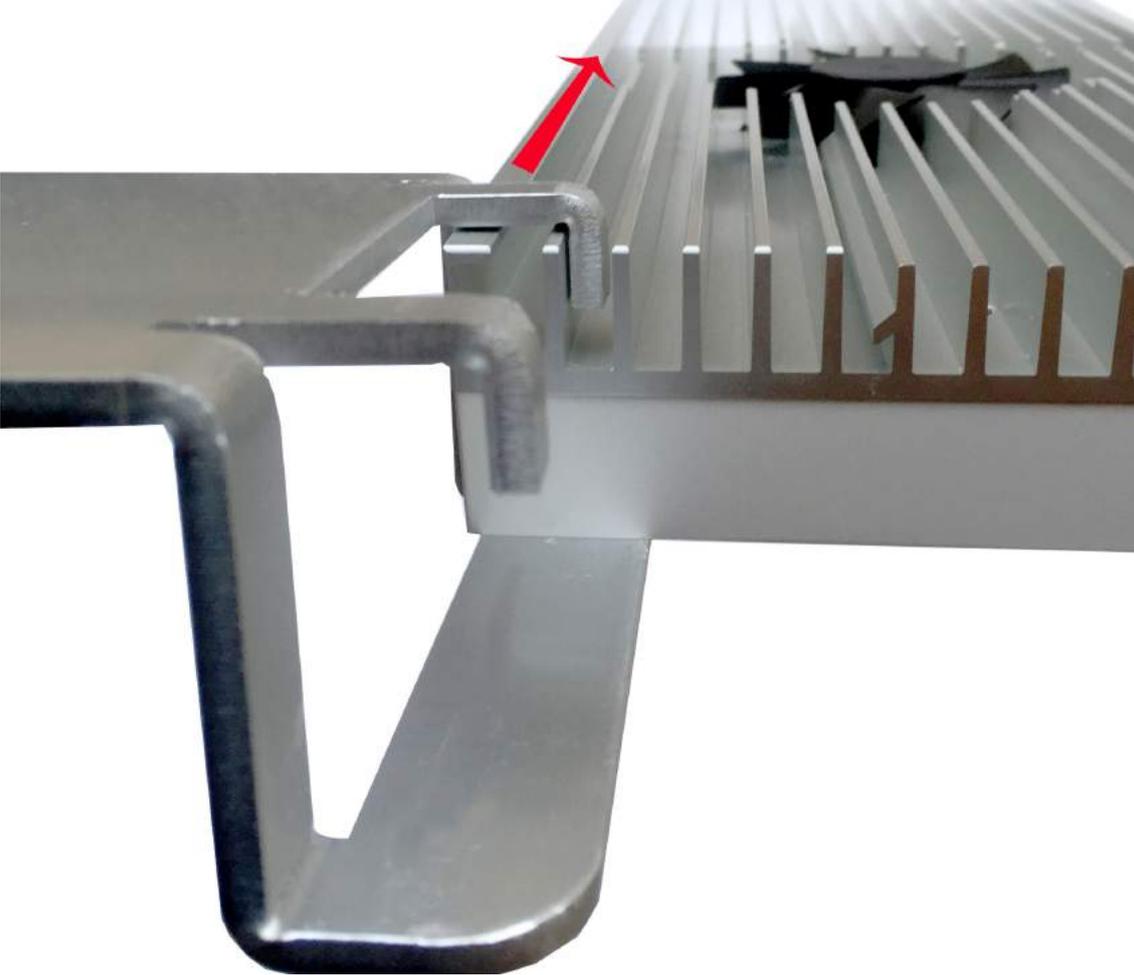

3. As the bracket approaches the control button on the back of the light unit lift the bracket away from the button slightly to avoid damaging the status control button.

Sliding the bracket against the button with force will damage the button!


Once the bracket clears the button the bracket can be allowed to come to rest against the light again.

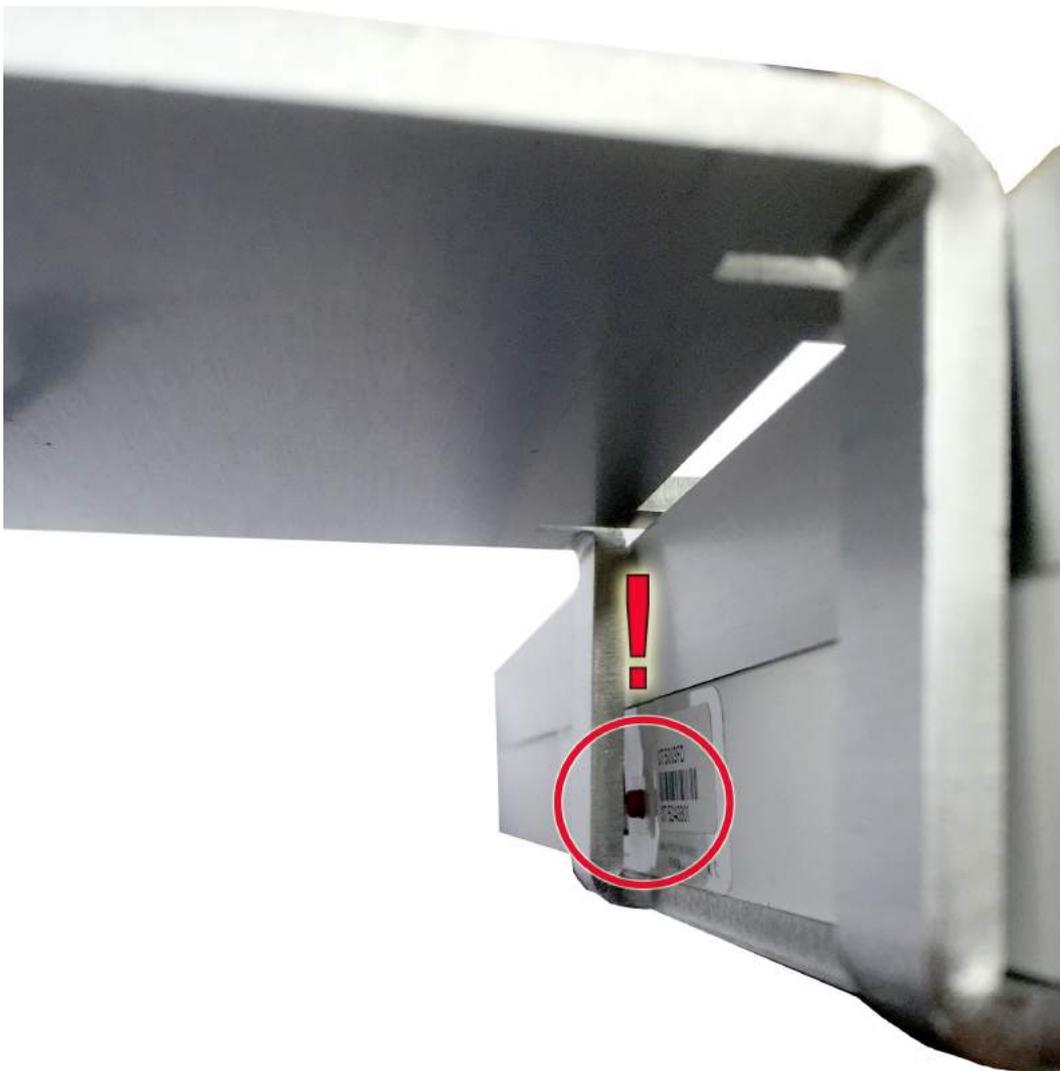

4. With the bracket in place and centered along the length of the lights heat sink the grill can now be re-installed. This will trap the bracket so it can't be moved along the heat sink.


To do this locate one end of the grill into its location slot , bend the grill gently so it bows up in the center and clip the other end of the grill into the locating slot in the heat sink.

If the bracket holding clamps have already been fitted the bracket will now be ready to install.

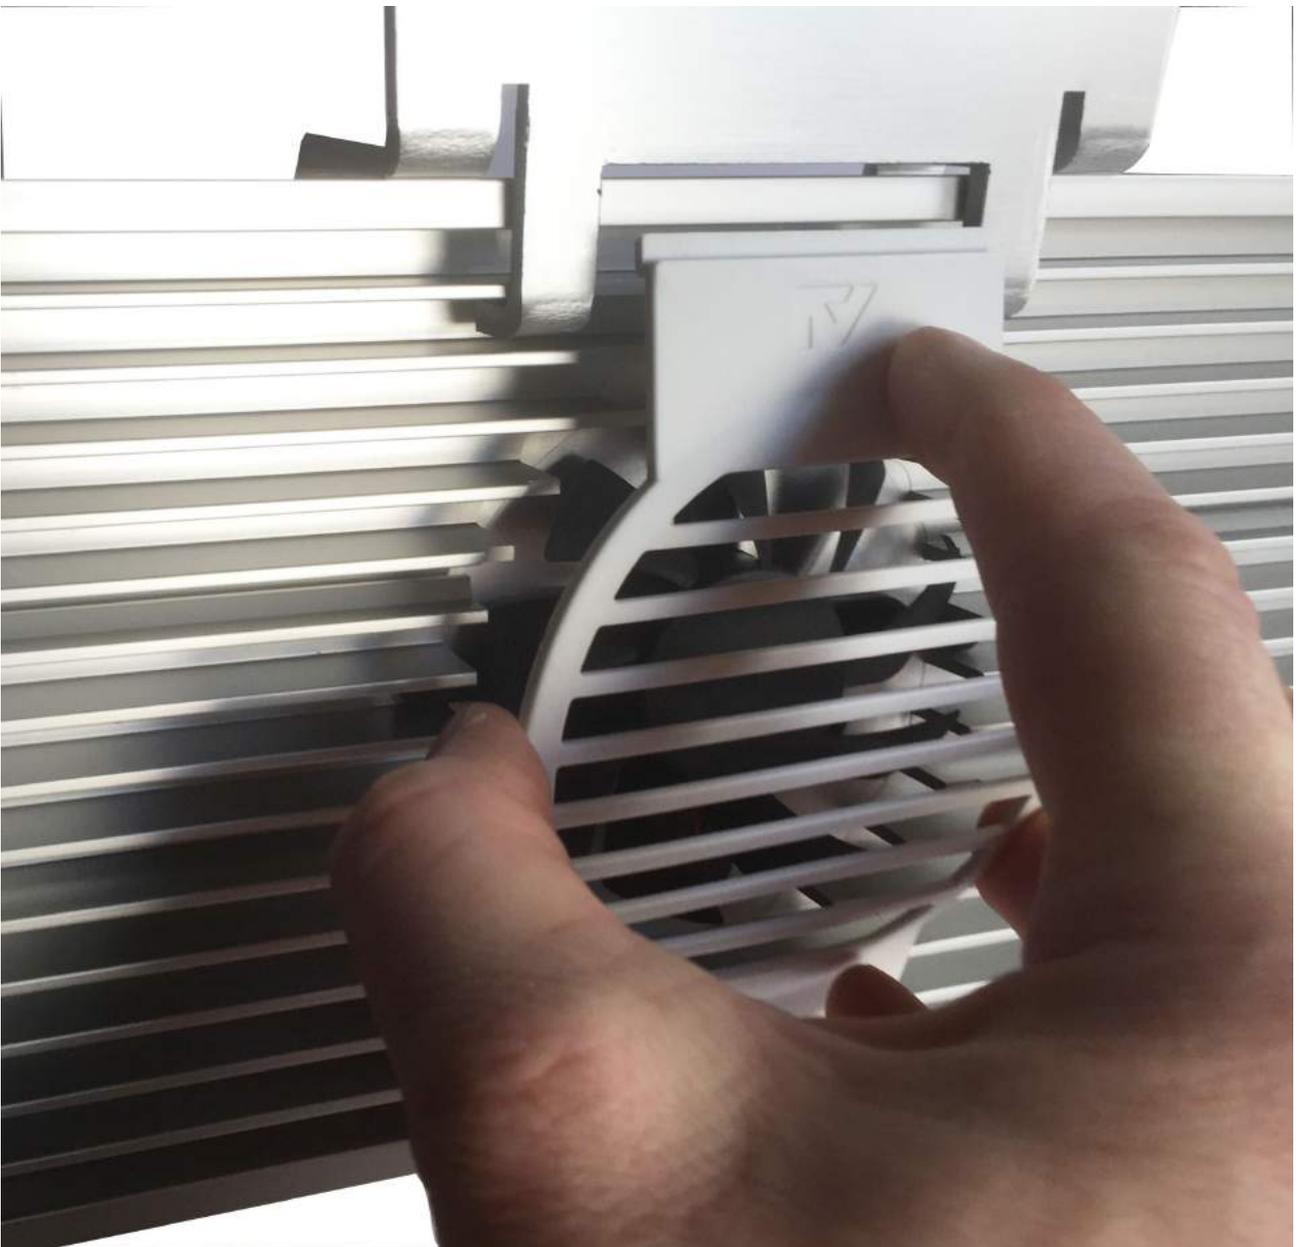


Note the following:

Correct fitment. (Inner fin)

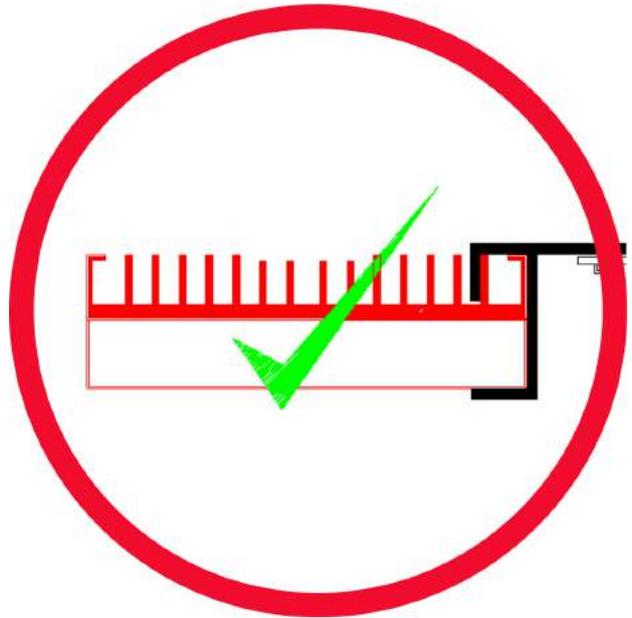

Incorrect fitment (Outer fin)

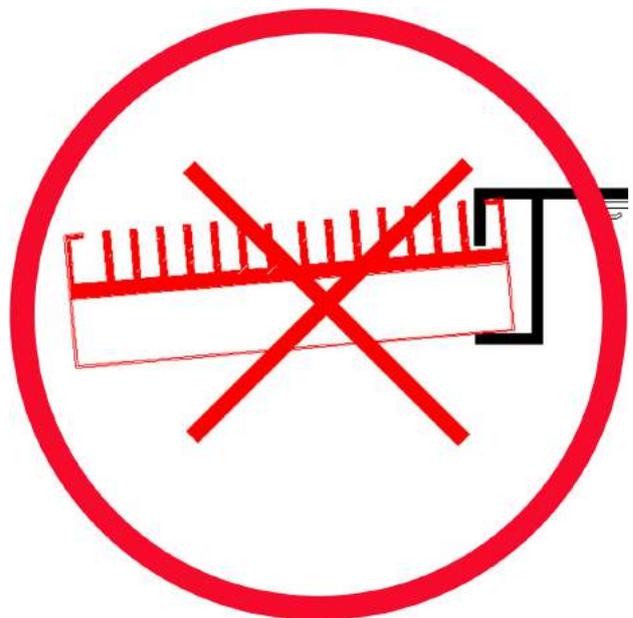

For more information please visit us at :

<http://www.theaquariumsolution.com>

